


**INSTRUMENT
APPROACH
CHART - ICAO**

AD ELEV **68 FT**
HEIGHTS RELATED TO
THR RWY 24 ELEV **60 FT**

TALLINN RADAR 127.900
ÄMARI TOWER 120.900 / 257.800

**ÄMARI (EEEE)
MILITARY AERODROME**


ILS or LOC RWY 24
(CAT C;D;E)

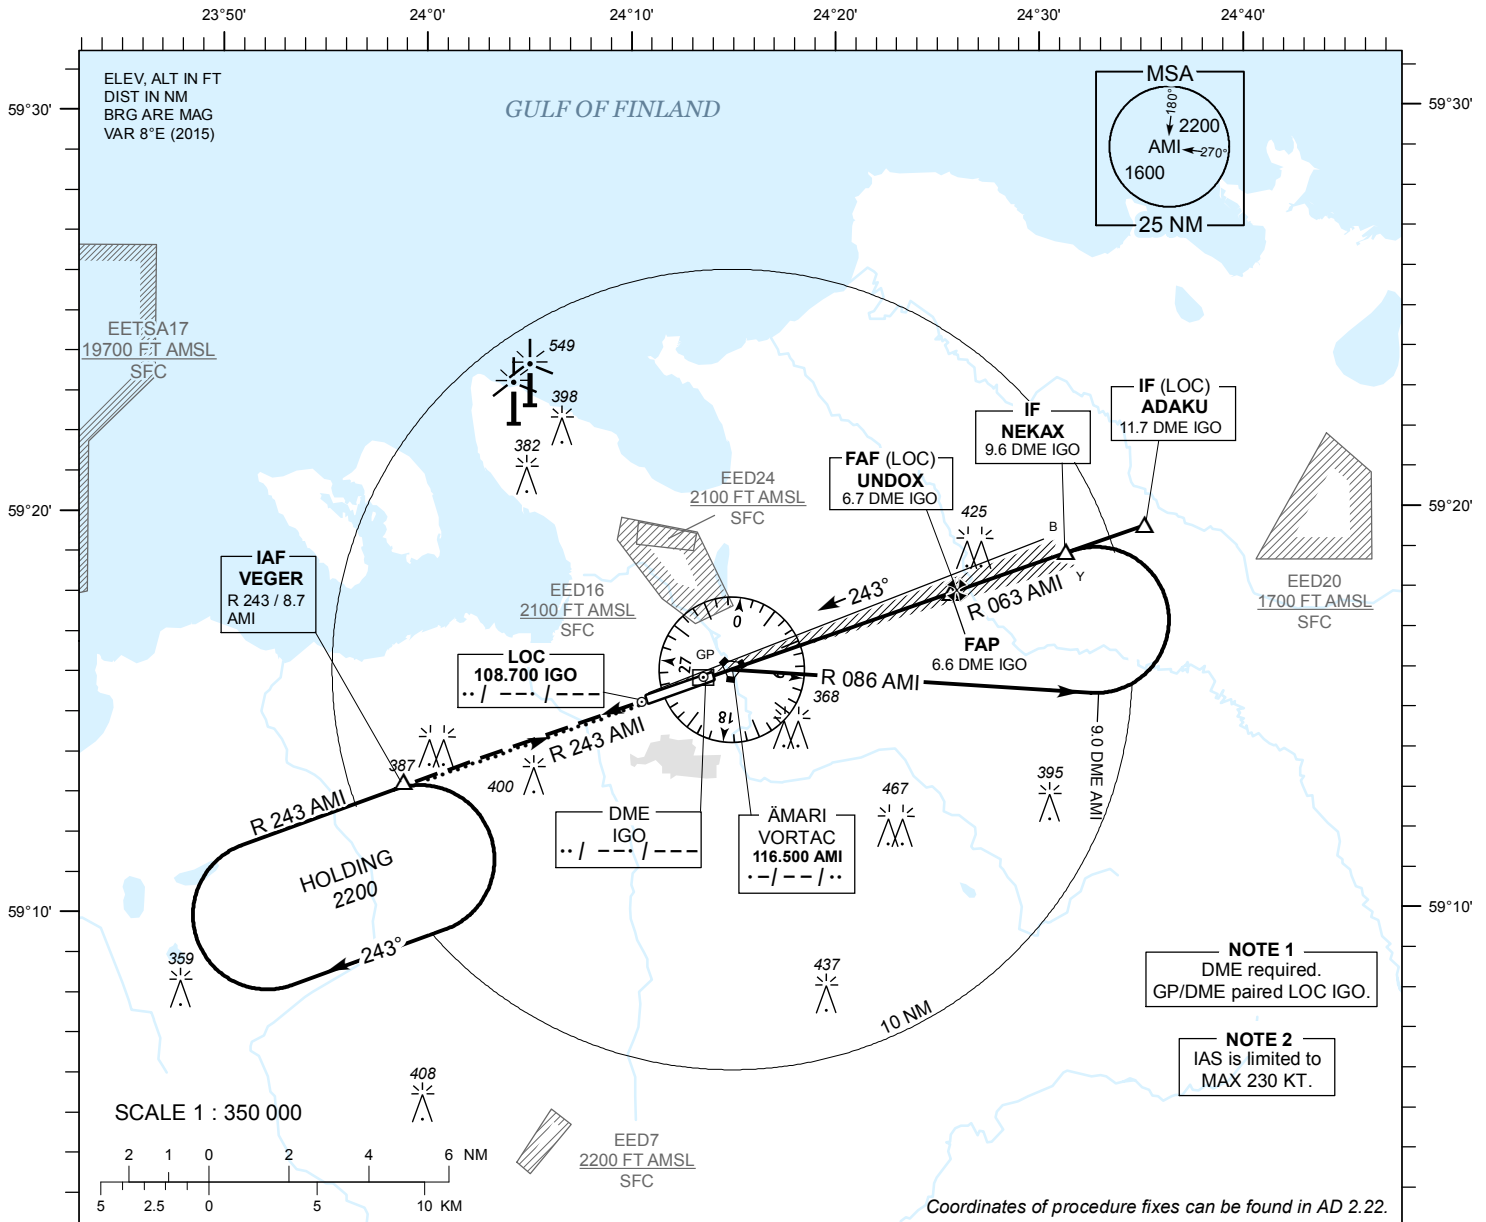

NOTE 1
DME required.
GP/DME paired LOC IGO.

NOTE 2
IAS is limited to
MAX 230 KT.

SCALE 1 : 350 000



Coordinates of procedure fixes can be found in AD 2.22.

MISSED APPROACH

Climb on track 243 to 2200 and expect radar vectors. Contact TALLINN RADAR FREQ 127.9 MHz.


COMMUNICATION FAILURE

Climb straight ahead. Join VEGER holding climbing to 2200. Start new approach after one full holding and land.

TRANSITION ALT 5000

DME IGO	1 NM	2 NM	3 NM	4 NM	5 NM	6 NM
ALT	390	700	1020	1340	1660	1980
HGT	(330)	(650)	(960)	(1280)	(1600)	(1920)

Table for LOC ONLY approach.

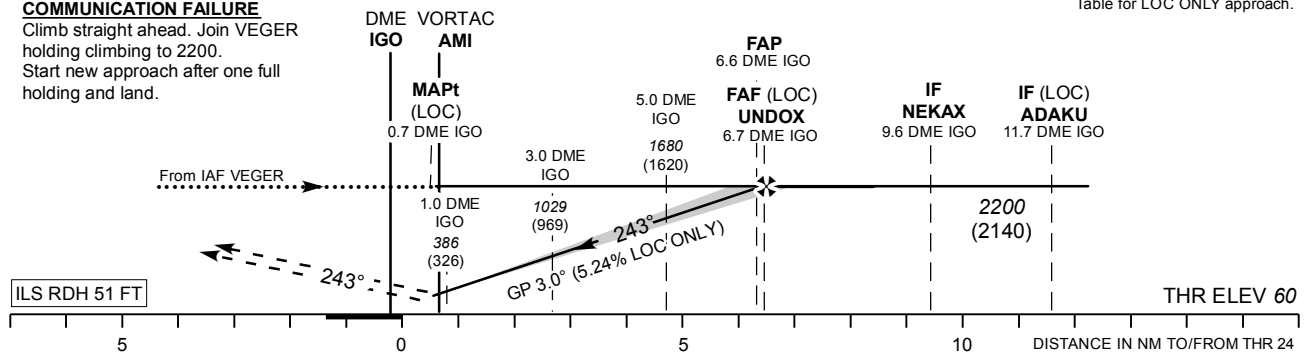

ILS RDH 51 FT

THR ELEV 60

Timing not authorized for defining the MAPt.

Straight-in Approach	CAT I	C	D	E	LOC ONLY	KT	100	120	140	160	180	200	220
					LOC ONLY	318 (258)	328 (268)	347 (287)	380 (320)	MIN : SEC	3:36	3:00	2:34
Circling		800 (730)	970 (900)		Rate of descent	FT / MIN	535	640	745	850	960	1065	1170

CHANGES : EETS17 added.