STANDARD ARRIVAL CHART INSTRUMENT (STAR) - ICAO

TRANSITION ALTITUDE
5000

TOWER	135.905
RADAR	127.905
ATIS	124.880 / TEL: +372 625 8210

LENNART MERI TALLINN (EETN)

RNAV (GNSS) STAR
RWY 26

DOBAN 1L DOPIK 1L GONOS 1L
KEMET 1L OSMUR 1L RENKU 1L SULUN 1L

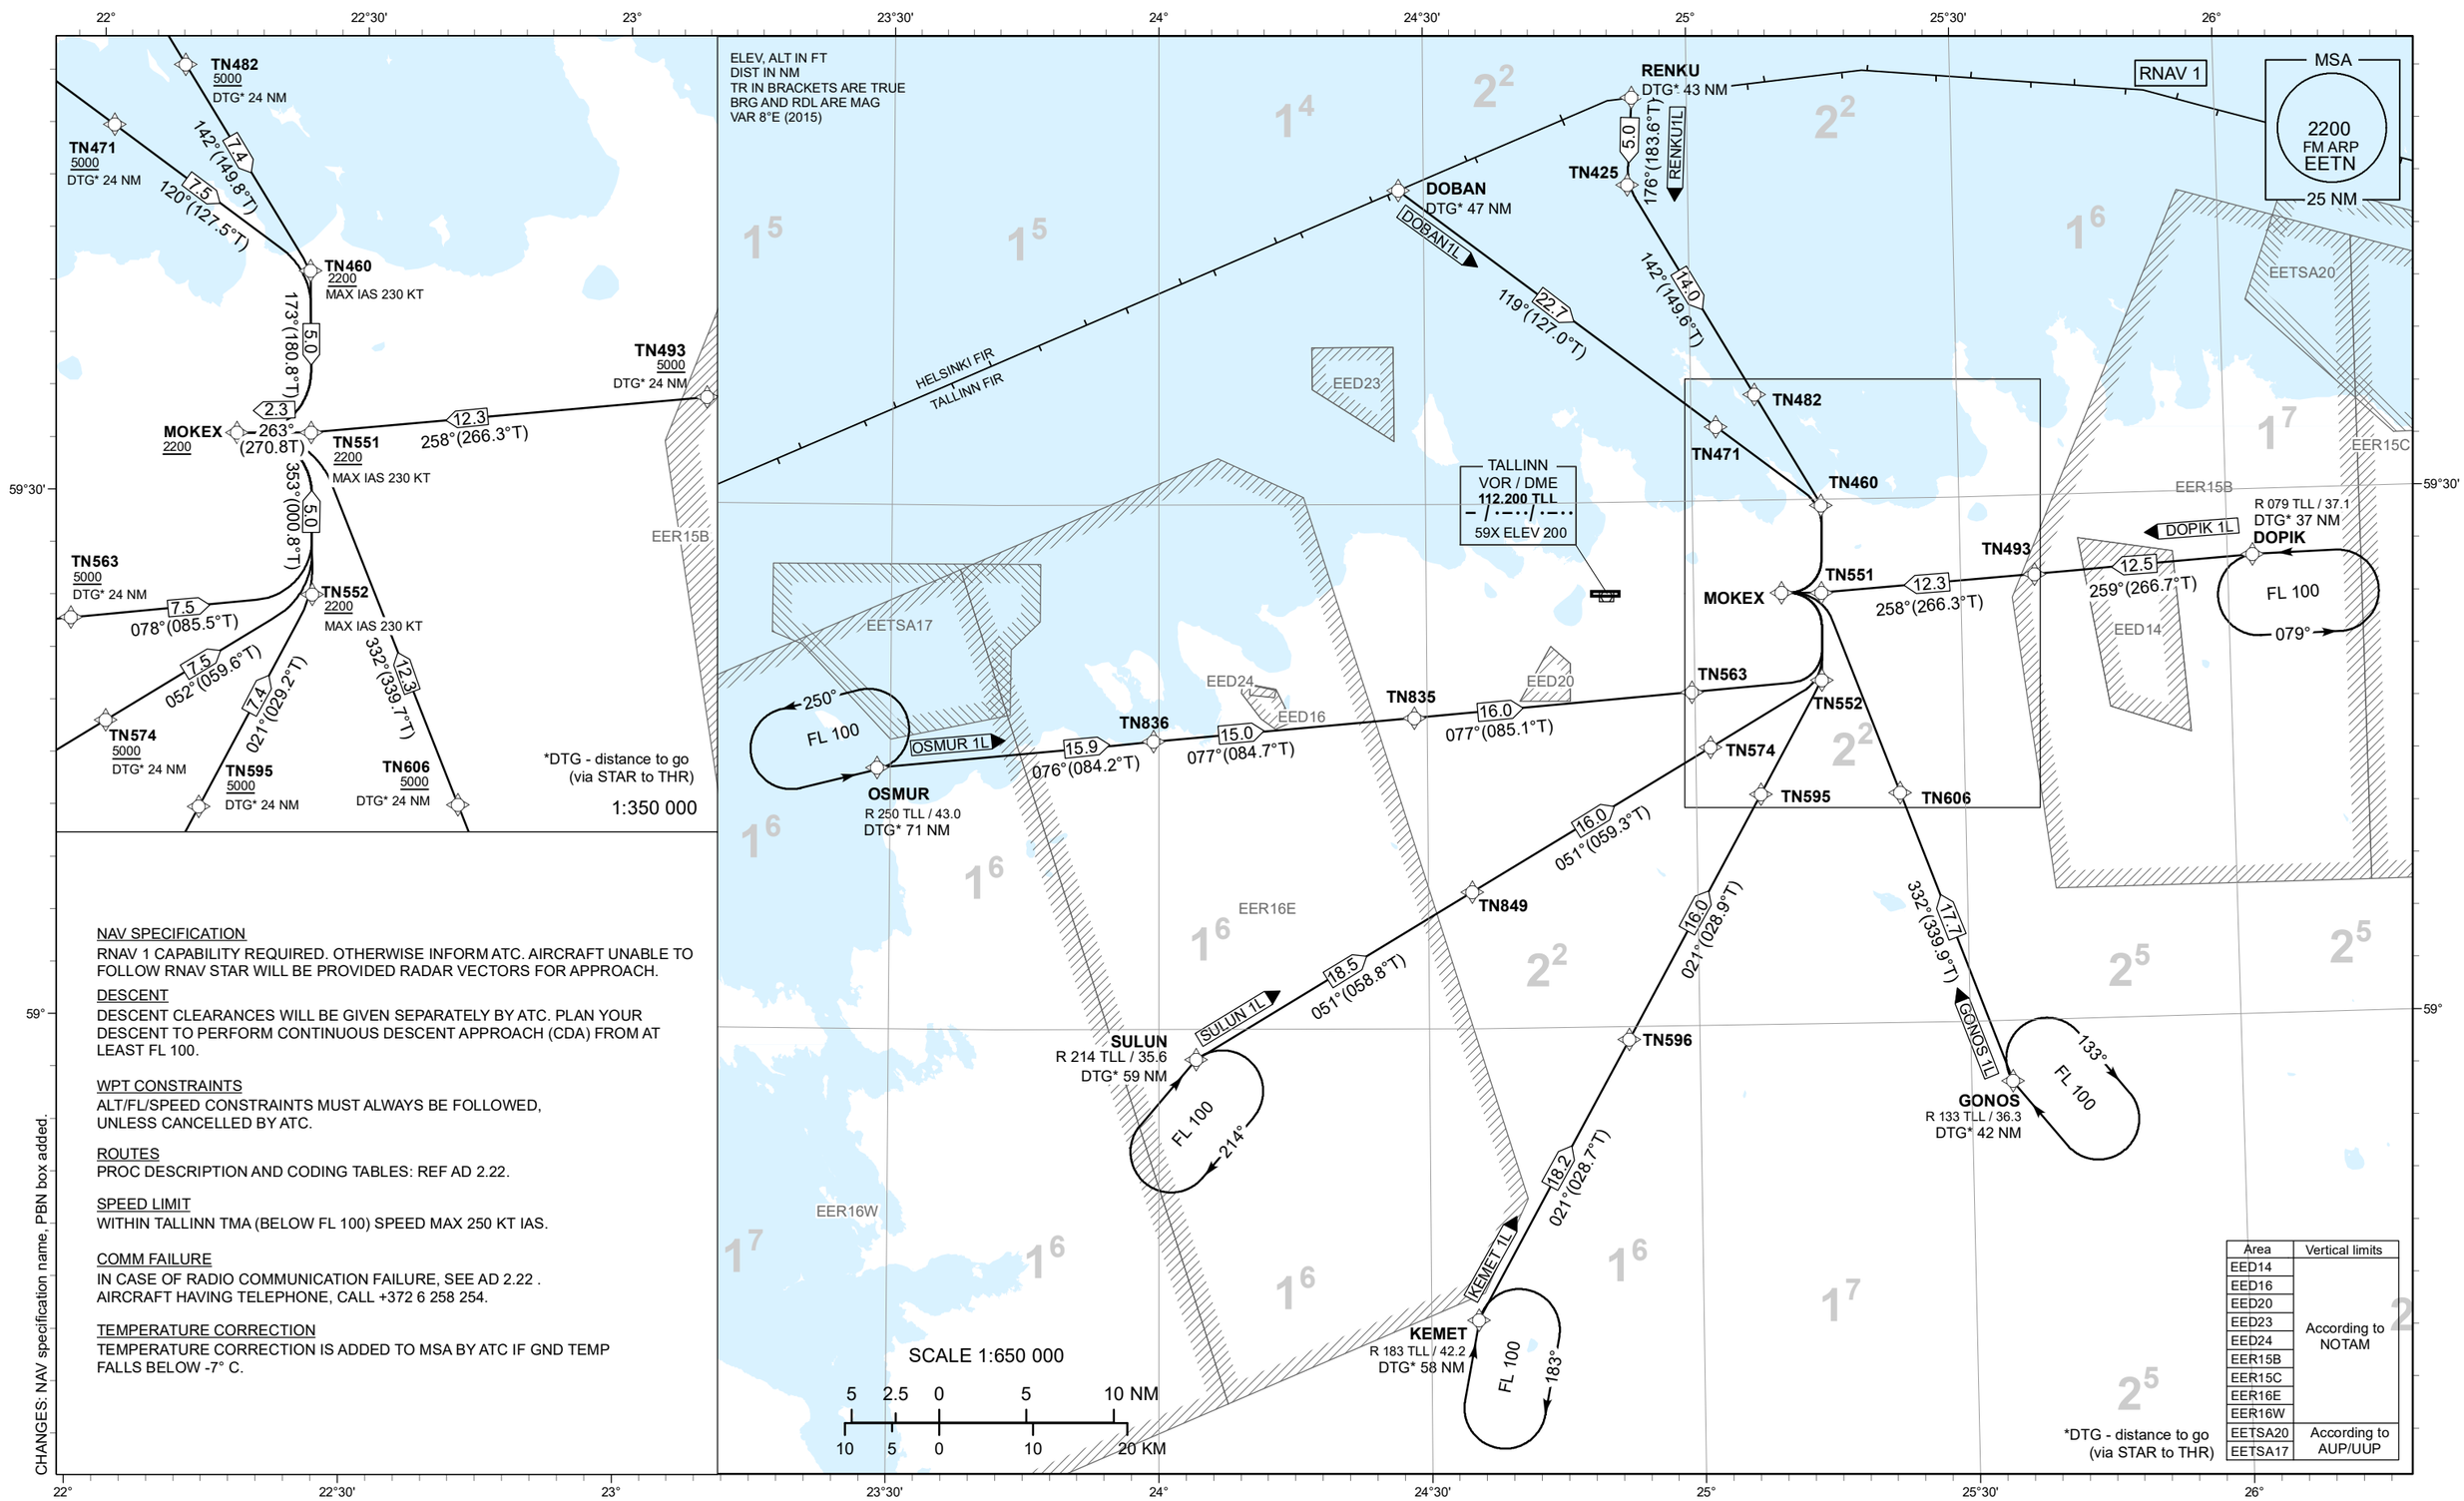

Area	Vertical limits
EED14	According to NOTAM
EED16	
EED20	
EED23	
EED24	
EER15B	
EER15C	
EER16E	
EER16W	
EETSA20	According to AUP/UUP
EETSA17	

NAV SPECIFICATION

RNAV 1 CAPABILITY REQUIRED. OTHERWISE INFORM ATC. AIRCRAFT UNABLE TO FOLLOW RNAV STAR WILL BE PROVIDED RADAR VECTORS FOR APPROACH.

DESCENT

DESCENT CLEARANCES WILL BE GIVEN SEPARATELY BY ATC. PLAN YOUR DESCENT TO PERFORM CONTINUOUS DESCENT APPROACH (CDA) FROM AT LEAST FL 100.

WPT CONSTRAINTS

ALT/FL/SPEED CONSTRAINTS MUST ALWAYS BE FOLLOWED, UNLESS CANCELLED BY ATC.

ROUTES

PROC DESCRIPTION AND CODING TABLES: REF AD 2.22.

SPEED LIMIT

WITHIN TALLINN TMA (BELOW FL 100) SPEED MAX 250 KT IAS.

COMM FAILURE

IN CASE OF RADIO COMMUNICATION FAILURE, SEE AD 2.22 . AIRCRAFT HAVING TELEPHONE, CALL +372 6 258 254.

TEMPERATURE CORRECTION

TEMPERATURE CORRECTION IS ADDED TO MSA BY ATC IF GND TEMP FALLS BELOW -7° C.

CHANGES: NAV specification name, PBN box added.