ELEV in FT
BRG are MAG
DIMENSIONS in M

VAR 9° E 2020

ANNUAL RATE
OF CHANGE + 0.2°

Taxiways A, B, C, E, F, G, H, HL, HR, S, T, Z - 23 M wide.
Taxiways Y2, Y3, Y5, Y6 - 10 M wide.
Taxiway Y4 - 21 M wide – TOWING ONLY.
Taxiway D - 18 M wide.

BEARING STRENGTH

RWY PCN 60 F/B/X/T	TWY T – PCN 97/F/A/X/T
TWY A – PCN 78/F/A/X/T	TWY Y2 – PCN 32/F/B/Y/U
TWY B – PCN 71/F/A/X/T	TWY Y3 – PCN 32/F/B/Y/U
TWY C – PCN 85/F/A/X/T	TWY Y4 – PCN 78/F/A/X/T*
TWY D – PCN 26/F/B/X/T	TWY Y5 – PCN 78/F/A/X/T
TWY E – PCN 47/F/A/X/T	TWY Y6 – PCN 78/F/A/X/T
TWY F – PCN 97/F/A/X/T	TWY Z – PCN 97/F/A/X/T
TWY G – PCN 97/F/A/X/T	APN K – PCN 81/F/A/X/T
TWY H - PCN 97/F/A/X/T	APN M – PCN 81/F/A/X/T
TWY HL - PCN 97/F/A/X/T	APN Y2 – PCN 32/F/B/Y/U
TWY HR - PCN 97/F/A/X/T	APN Y3 – PCN 32/F/B/Y/U
TWY S – PCN 97/F/A/X/T	APN Y5 – PCN 32/F/B/Y/U

* TOWING ONLY

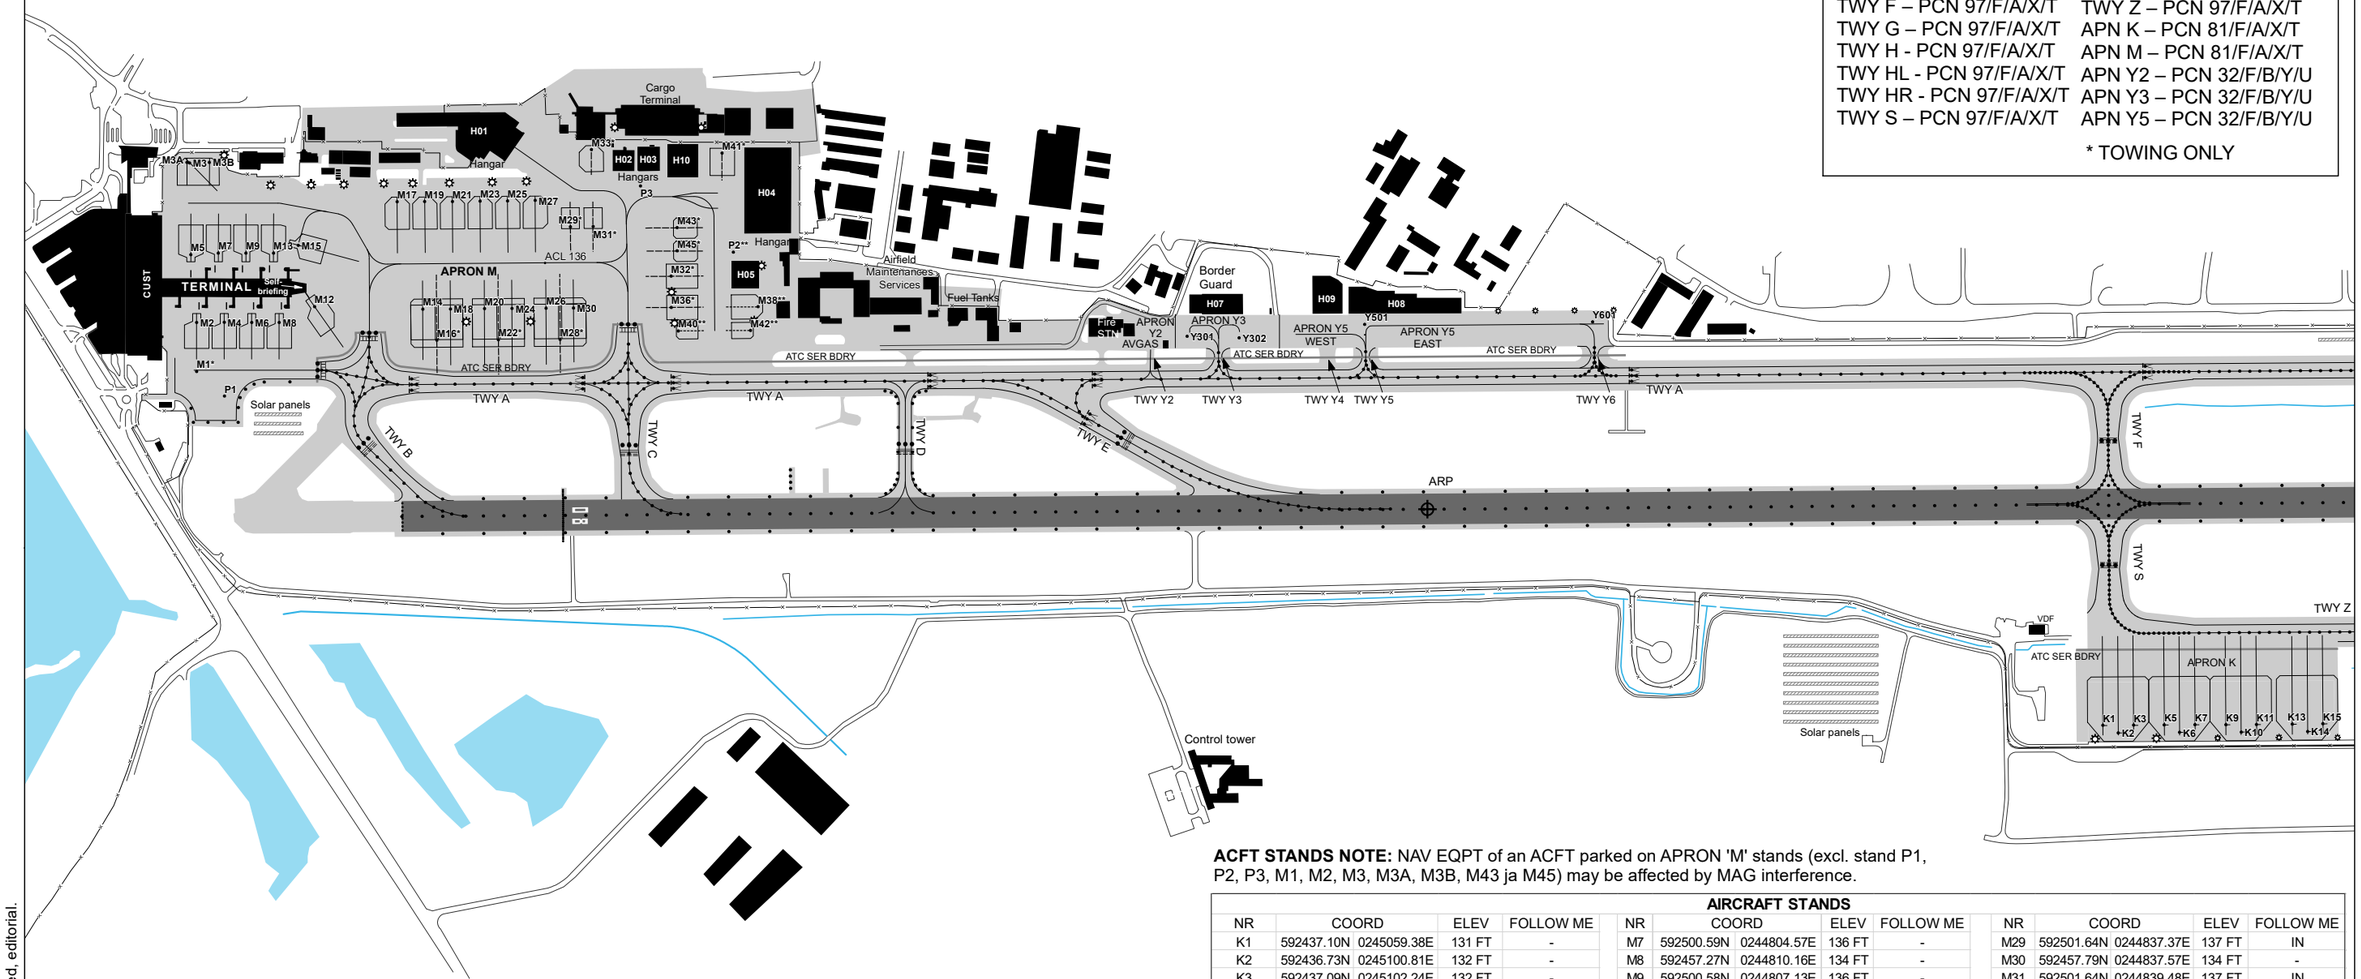

ACFT STANDS NOTE: NAV EQPT of an ACFT parked on APRON 'M' stands (excl. stand P1, P2, P3, M1, M2, M3, M3A, M3B, M43 ja M45) may be affected by MAG interference.

AIRCRAFT STANDS

NR	COORD		ELEV	FOLLOW ME	NR	COORD		ELEV	FOLLOW ME	NR	COORD		ELEV	FOLLOW ME
K1	592437.10N	0245059.38E	131 FT	-	M7	592500.59N	0244804.57E	136 FT	-	M29	592501.64N	0244837.37E	137 FT	IN
K2	592436.73N	0245100.81E	132 FT	-	M8	592457.27N	0244810.16E	134 FT	-	M30	592457.79N	0244837.57E	134 FT	-
K3	592437.09N	0245102.24E	132 FT	-	M9	592500.58N	0244807.13E	136 FT	-	M31	592501.64N	0244839.48E	137 FT	IN
K5	592437.08N	0245105.09E	131 FT	-	M12	592458.00N	0244813.47E	135 FT	-	M32	592459.24N	0244846.67E	134 FT	IN
K6	592436.72N	0245106.51E	131 FT	-	M13	592500.56N	0244809.70E	136 FT	-	M33	592505.29N	0244839.40E	140 FT	IN
K7	592437.07N	0245107.94E	131 FT	-	M14	592457.82N	0244823.54E	135 FT	-	M36	592457.76N	0244846.66E	133 FT	IN
K9	592437.06N	0245110.82E	131 FT	-	M15	592500.92N	0244812.01E	137 FT	-	M38	592457.74N	0244854.73E	133 FT	IN/OUT
K10	592436.70N	0245112.24E	131 FT	-	M16	592456.34N	0244824.81E	134 FT	IN	M40	592456.64N	0244847.29E	132 FT	IN/OUT
K11	592437.05N	0245113.67E	131 FT	-	M17	592502.93N	0244821.27E	140 FT	-	M41	592505.05N	0244851.56E	139 FT	IN
K13	592437.04N	0245117.00E	131 FT	-	M18	592457.81N	0244826.11E	135 FT	-	M42	592456.62N	0244854.00E	131 FT	IN/OUT
K14	592436.68N	0245118.42E	131 FT	-	M19	592502.92N	0244823.83E	140 FT	-	M43	592501.54N	0244847.29E	137 FT	IN
K15	592437.04N	0245119.85E	131 FT	-	M20	592457.81N	0244829.28E	135 FT	-	M45	592500.44N	0244847.27E	135 FT	IN
M1	592454.99N	0244802.42E	132 FT	IN	M21	592502.91N	0244826.41E	139 FT	-	Y301	592456.09N	0244934.62E	131 FT	-
M2	592457.32N	0244802.48E	134 FT	-	M22	592456.32N	0244830.54E	133 FT	IN	Y302	592455.99N	0244939.47E	131 FT	-
M3	592504.88N	0244802.00E	140 FT	-	M23	592502.91N	0244828.98E	139 FT	-	Y501	592456.43N	0244950.96E	133 FT	-
M3A	592504.91N	0244801.74E	140 FT	-	M24	592457.80N	0244831.84E	134 FT	-	Y601	592456.54N	0245012.37E	133 FT	-
M3B	592504.90N	0244803.84E	140 FT	-	M25	592502.90N	0244831.55E	138 FT	-	P1	592453.81N	0244804.98E	131 FT	-
M4	592457.31N	0244805.04E	134 FT	-	M26	592457.79N	0244835.00E	134 FT	-	P2	592500.35N	0244852.50E	135 FT	IN/OUT
M5	592500.53N	0244802.01E	136 FT	-	M27	592502.91N	0244834.11E	138 FT	-	P3	592503.54N	0244843.94E	138 FT	-
M6	592457.29N	0244807.60E	134 FT	-	M28	592456.31N	0244836.27E	132 FT	IN					

LEGEND

- Docking Guidance System SAFEDOC
- 5 — Aircraft Stand - CONC SFC
- Flood Light
- 5 — Aircraft Stands and Taxiway Centre Line or Lead-in-Line
- 22* — Stand - "FOLLOW ME" IN
- 38** — Stand - "FOLLOW ME" IN/OUT
- intermediate holding position
- runway-holding position (Pattern A)
- runway-holding position (Pattern B)
- stop bar
- intermediate holding position lights
- ATC SER BDRY

1:9 000

50 25 0 50 100 150 200 250 300 M

200 100 0 200 400 600 800 1000 FT

CHANGES: ACFT stand M41 changed, P3 added, editorial.