


**INSTRUMENT  
APPROACH  
CHART - ICAO**

AD ELEV **68 FT**  
HEIGHTS RELATED TO  
THR RWY 06 ELEV **65 FT**

TALLINN RADAR 127.900  
ÄMARI TOWER 120.900 / 257.800

**ÄMARI (EEEE)  
MILITARY AERODROME**  
ILS or LOC RWY 06  
(CAT C;D;E)

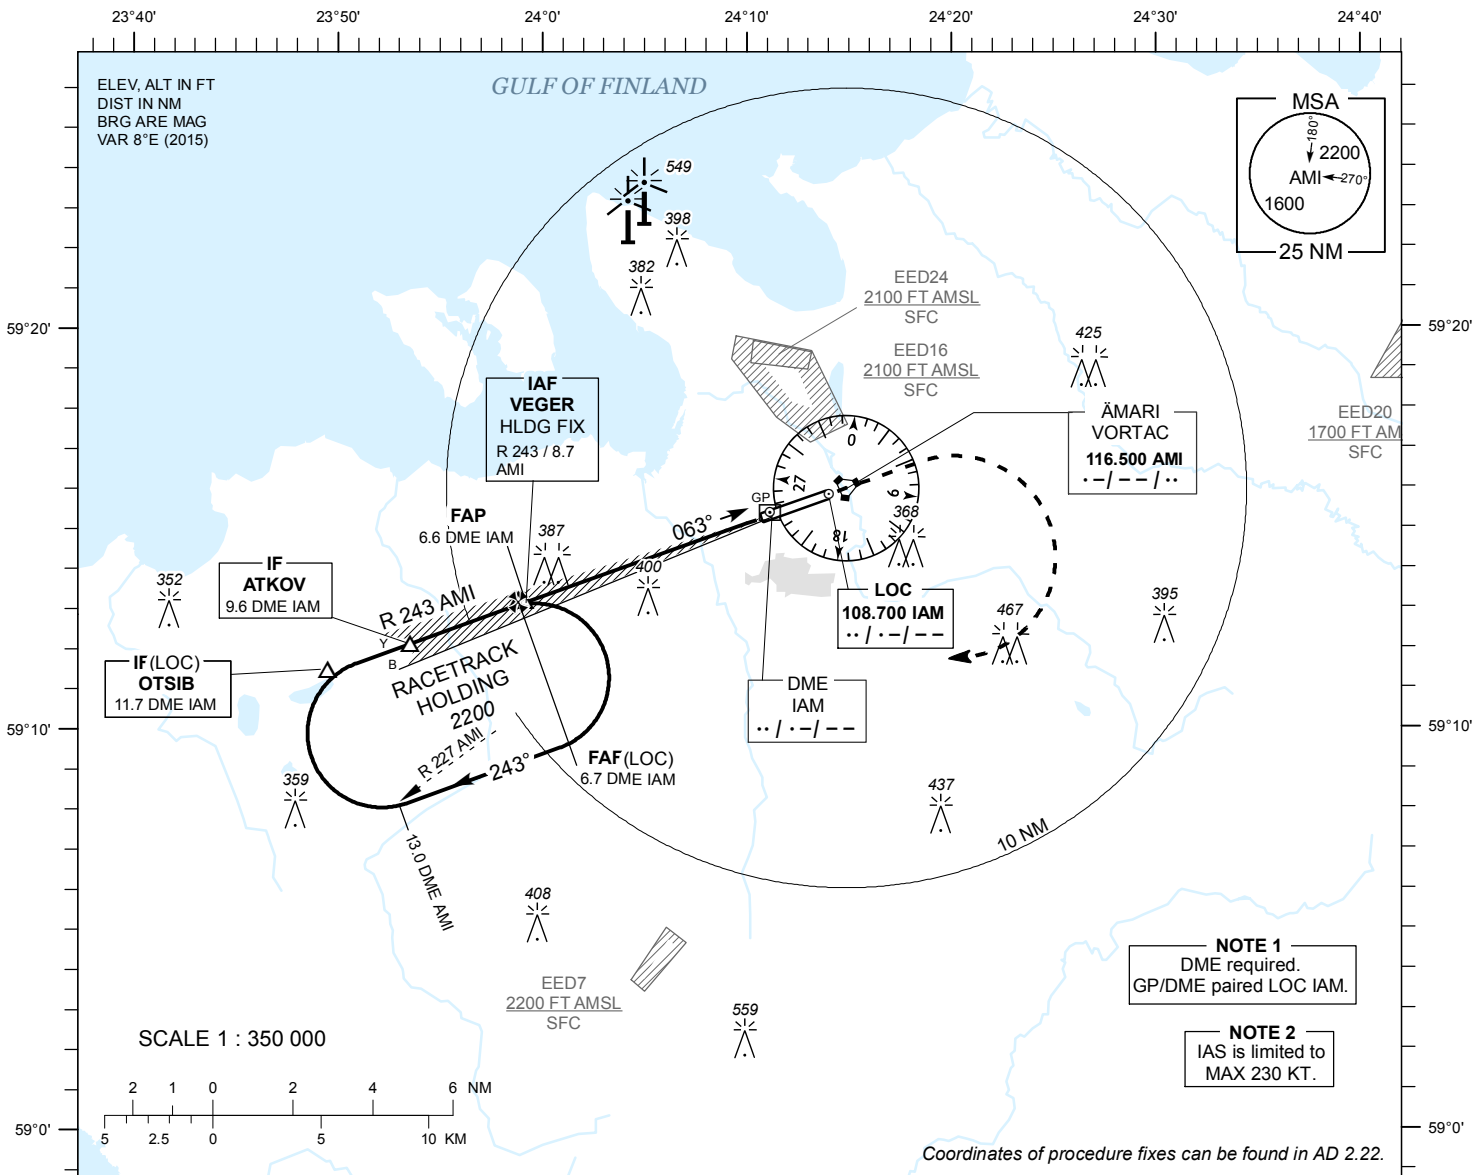

DME IAM	6 NM	5 NM	4 NM	3 NM	2 NM	1 NM
ALT	1980	1660	1340	1020	700	390
HGT	(1920)	(1600)	(1280)	(960)	(640)	(320)

Table for LOC ONLY approach.


TRANSITION ALT **5000**

**MISSED APPROACH**

Climb on track 063. After crossing AMI VORTAC and at 1300 or above turn right heading 160 climbing to 2200. Contact TALLINN RADAR FREQ 127.9 MHz.

**COMMUNICATION FAILURE**

Climb on track 063. After crossing AMI VORTAC and at 1300 or above turn right to join VEGER holding climbing to 2200. Start new approach after one full holding and land.

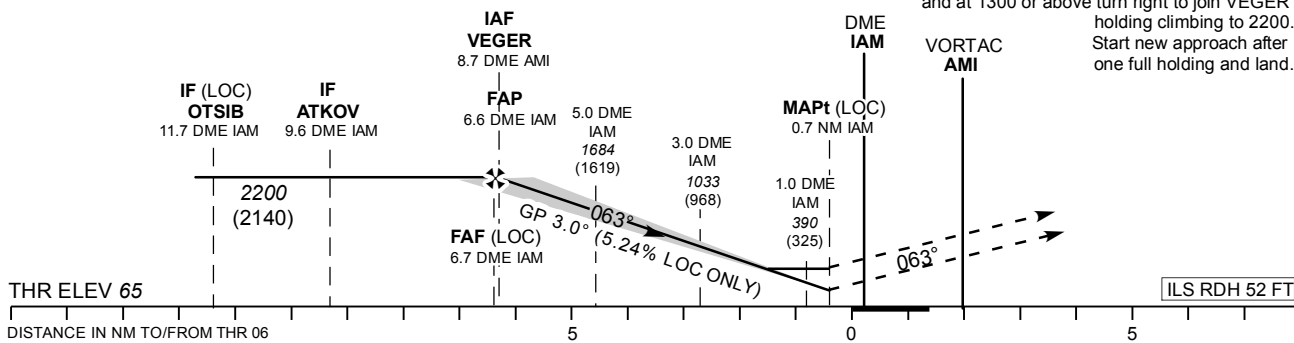

OCA (H)		C	D	E	LOC ONLY	KT	100	120	140	160	180	200	220
Straight-in Approach	CAT I	280 (215)	290 (225)	310 (245)	LOC ONLY	MIN : SEC	3:36	3:00	2:34	2:15	2:00	1:48	1:38
	LOC ONLY	640 (580)					Rate of descent	FT / MIN	535	640	745	850	960
Circling		800 (730)		970 (900)									

CHANGES : AD elevation, ILS Cat I OCA(H), obstacle elevations, Note 1, editorial.