


INSTRUMENT APPROACH CHART - ICAO

AD ELEV 68 FT
HEIGHTS RELATED TO
THR RWY 06 ELEV 65 FT

TALLINN RADAR 127.900
ÄMARI TOWER 122.100 / 257.800

ÄMARI (EEEE) MILITARY AERODROME

ILS or LOC RWY 06
(CAT A;B)

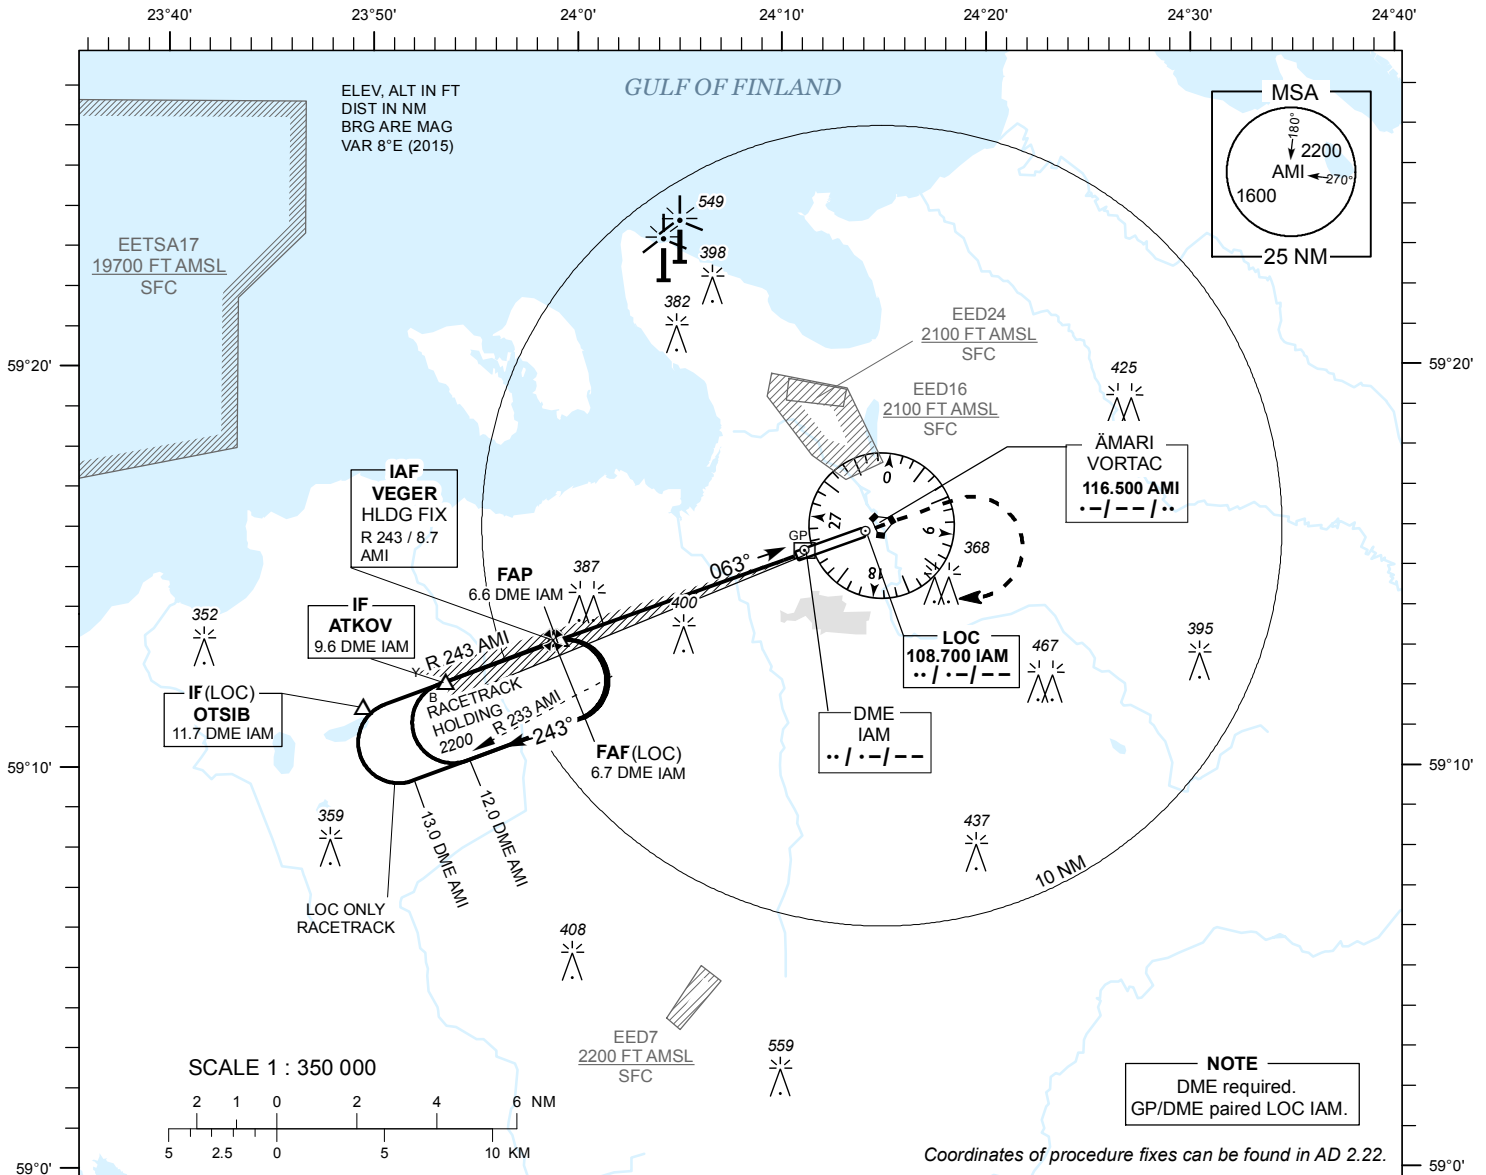

DME IAM	6 NM	5 NM	4 NM	3 NM	2 NM	1 NM
ALT	1980	1660	1340	1020	700	390
HGT	(1920)	(1600)	(1280)	(960)	(640)	(320)


Table for LOC ONLY approach.

TRANSITION ALT 5000

MISSED APPROACH
Climb on track 063. After crossing AMI VORTAC and at 1300 or above turn right heading 160 climbing to 2200. Contact TALLINN RADAR FREQ 127.9 MHz.

COMMUNICATION FAILURE
Climb on track 063. After crossing AMI VORTAC and at 1300 or above turn right to join VEGER holding climbing to 2200. Start new approach after one full holding and land.

CHANGES: TWR FREQ.

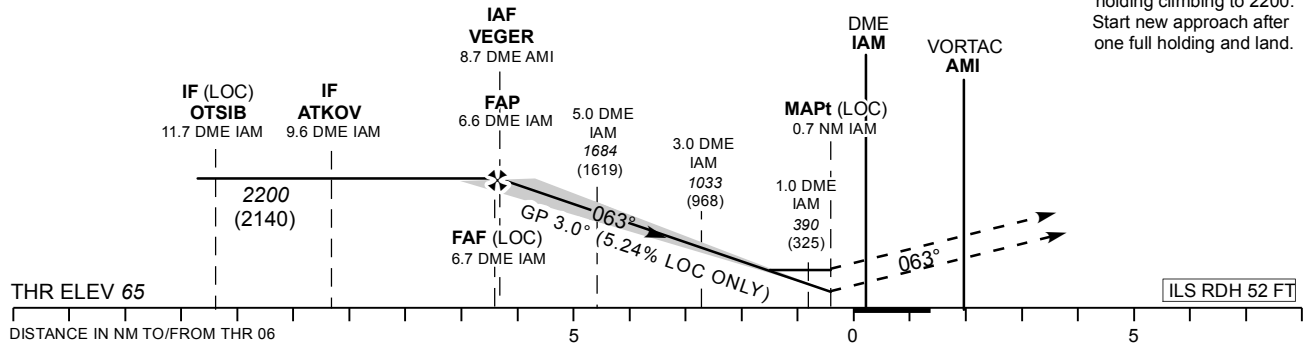

		OCA (H)	A	B							
Straight-in Approach	CAT I		259 (194)	272 (207)	LOC ONLY	KT	80	90	100	120	140
	LOC ONLY		640 (580)		FAF- MAPt 6.0 NM	MIN : SEC	4:30	4:00	3:36	3:00	2:34
Circling			500 (430)	660 (590)	Rate of descent	FT / MIN	425	480	535	640	745